




Van with boom lift, designed for the client

WORKING DIAGRAM

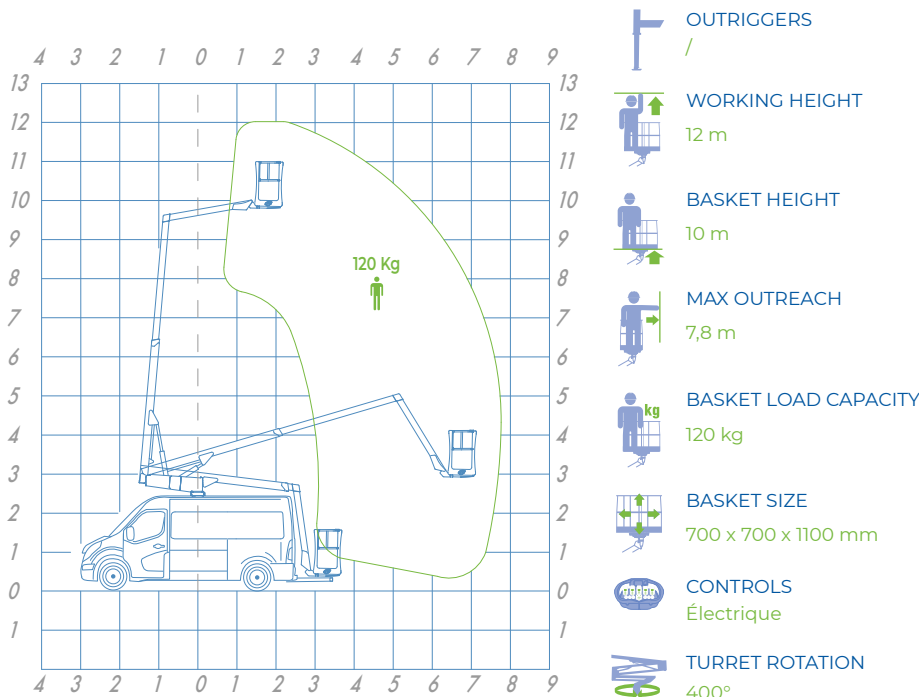

OUTRIGGERS
/

WORKING HEIGHT
12 m

BASKET HEIGHT
10 m

MAX OUTREACH
7,8 m

BASKET LOAD CAPACITY
120 kg

BASKET SIZE
700 x 700 x 1100 mm

CONTROLS
Électrique

TURRET ROTATION
400°


GVW
3,5 ton

DATA SHEET

- Fiberglass basket: 700x700x1100 mm
- 400° turret rotation
- Pipes and cables installed inside the boom
- Fixed jib
- No outriggers
- Single-seater basket in fiberglass with total opening
- Proportional electro-hydraulic controls with speed regulation of all movements
- Possibility of simultaneous movements
- Engine start/stop from the basket
- 230v and 12v socket in the basket
- Digital hour- counter
- CAN BUS electronic management system
- Cataphoresis

SAFETY DATA

- Unintentional maneuvering control E.C.S (Easy Control Security)
- Protection bar for involuntary maneuvers
- Magnetothermic with 230V line differential protection
- Automatic levelling of the basket
- Inclinometer
- Flanged block valves
- Emergency stop button
- Emergency manual pump
- 12V emergency electric pump
- Possibility of remote emergency operations
- Automatic PTO disengagement
- Maintenance light (Service)

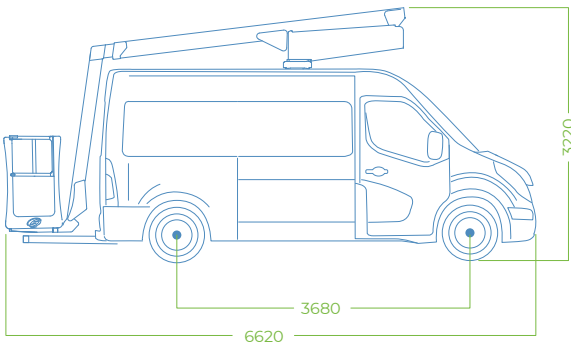

* Dimensions can change according to the assembly

